



Total Solution Provider in Saw Device

SR-043304-S40

Remote Control, 1-Port SAW Resonator
Revision 0: March 2014



- Electrical Characteristics
 - Package Dimensions
 - Testing Environment
 - Frequency Characteristics
-

SAWNICS Inc.

460 Cheonheung-ri, Seonggeo-eup, Cheonan-si, Chungcheongnam-do, 330-836 / Korea.
Tel: +82 41 550 9372 / Fax: +82 41 550 9399 / www.sawnics.com

□ Electrical Characteristics

Maximum Ratings


Parameters Description	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-40	-	+85
Storage Temperature Range	°C	-40	-	+85
Maximum DC Voltage	V	-	-	12
Maximum Input Power	dBm	-	-	0
Source Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Load Impedance (single ended) ⁽¹⁾	Ω	-	50	-
Package type & size	S40			
Length x Width	mm ²	-	5.0 x 5.0	-
Height	mm	-	-	1.7

Electrical Specification

Parameters Description	Unit	Minimum	Typical	Maximum
Center Frequency (Fr)	MHz	433.845	433.92	433.995
Insertion Loss (IL)	dB	-	1.0	2.0
Unloaded Quality factor (Qu)	-	-	14500	-
Loaded Quality factor (QL)	-	-	2500	-
Equivalent Elements				
Motional Capacitance (Cm)	fF	-	2.19	-
Motional Inductance (Lm)	μH	-	61.36	-
Motional Resistance (Rm)	Ω	-	11.803	25
Parallel Capacitance (Co)	pF	-	3.3	-
Temp. coeff.	ppm/c*2	-	0.032	-
Turnover To	deg.C	20	-	50

Notes : (1) No Matching Network .


Package Dimensions

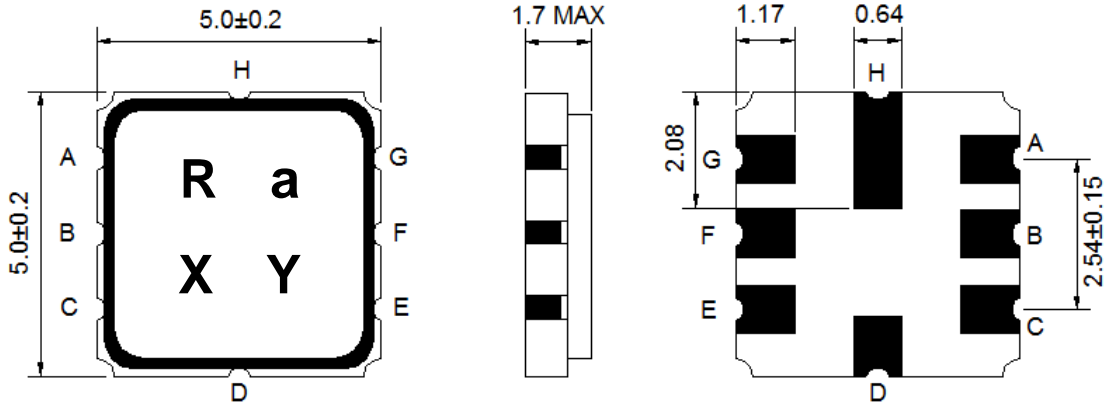

Marking Descriptions	
R	Resonator Application
a	Series Number
X	Date Code(Year)
Y	Date Code(Month)

Pin Description	
A, C, E, G	Ground
D, H	Case Ground
B	In or Out
F	Out or In

Testing Environment

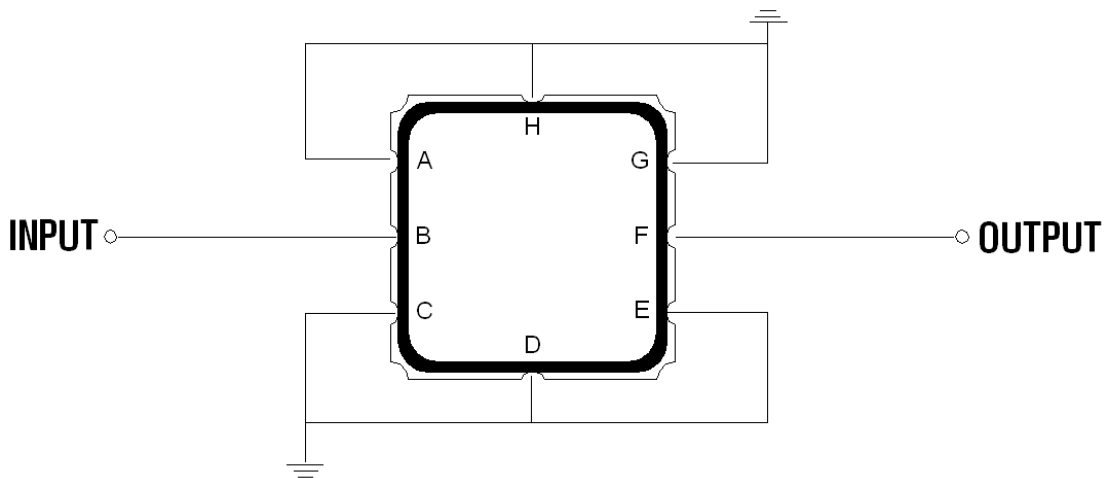

Source & Load Impedance: 50 Ω

□ Frequency Characteristics

Frequency Response

